


ATS7700

Plug-in PSTN kiezer voor ATSx500A Advanced panelen

PSTN plug-in card for ATSx500A, Advisor Advanced

The ATS7700 provides the possibility to add PSTN connectivity to the ATSx500A Advisor Advanced intrusion panels.

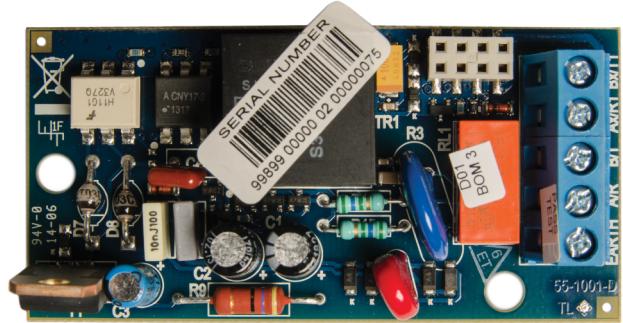

Details

- PSTN connectivity
- Plug-in PCB for ATSx500A Advisor Advanced control panels

ATS7700

Plug-in PSTN kiezer voor ATSx500A Advanced panelen

Technische specificaties

General

Product line Advisor Advanced

Network

Communicator type PSTN

Reporting

Supported receivers PSTN receivers

Electrical

Operating voltage 10.5 to 13.8 VDC

Current consumption 50 mA

Physical

Physical dimensions 90 x 40 mm

Environmental

Operating temperature 0 to +50°C

Relative humidity 95% non-condensing max.

Environment EN50130-5 ; Class II - Indoor (General)

Standards & regulation

Certification EN50131 Grade 3, VdS

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 22 April 2020 - 17:22

